SEALMASTER® Performance Mounted Ball Bearings



Duty: Standard
Rolling Elements: Ball
Lock: SKWEZLOC Locking Collar
Seal: Felt
Optional Seal: Contact
Temperature: -20° to 220°F

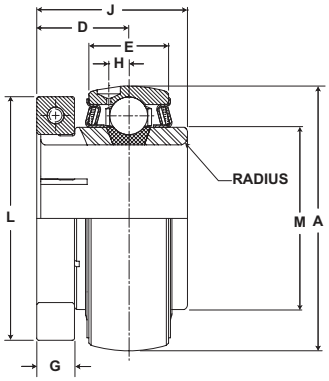

Standard Duty Bearing Insert – SKWEZLOC Locking Collar

Bore Diameter		Part No.	Basic Dynamic Rating lb/N	Dimensions inch / mm								Max Rad. To Clear	Torx Cap Screw	Unit Wt. lb/kg
inch	mm			A	D	E	G	H	J	L	M			
3/4	20	2-012T 5204TMC	2611 11614	1.8504 47	23/32 18.3	5/8 15.9	3/8 9.5	9/64 3.6	1 9/32 32.5	1 3/4 44.5	1 3/16 30.2	.040 1.02	T-25	.60 .27
15/16 1	25	2-015T 2-1T 5205TMC	2801 12459	2.0472 52	13/16 20.6	11/16 17.5	3/8 9.5	11/64 4.4	1 7/16 36.5	1 15/16 49.2	1 3/8 34.9	.040 1.02	T-25	.80 .36
1 1/8 1 3/16 1 1/4	30	2-12T 2-13T 1-14T 5206TMC	4381 19487	2.4409 62	7/8 22.2	7/8 22.2	3/8 9.5	7/32 5.6	1 9/16 39.7	2 3/16 55.6	1 19/32 40.5	.040 1.02	T-25	1.2 .54
1 1/4		2-14T	5782 25718	2.8346 72	1 25.4	15/16 23.8	7/16 11.1	1/4 6.4	1 3/4 44.5	2 7/16 61.9	1 55/64 47.2	.040 1.02	T-27	1.8 .82
1 3/8 1 7/16	35	2-16T 2-17T 5207TMC	5782 25718	2.8346 72	1 25.4	15/16 23.8	7/16 11.1	1/4 6.4	1 3/4 44.5	2 9/16 65.1	1 55/64 47.2	.040 1.02	T-27	1.8 .82
1 1/2 1 9/16	40	2-18T 2-19T 5208TMC	7340 32648	3.1496 80	1 3/16 30.2	1 3/32 27.8	7/16 11.1	19/64 7.5	2 50.8	2 11/16 68.3	2 1/16 52.4	.062 1.57	T-27	2.2 1.00
1 5/8		2-110T	7901 35144	3.3465 85	1 3/16 30.2	1 3/32 27.8	7/16 11.1	19/64 7.5	2 50.8	2 13/16 71.4	2 19/64 58.3	.062 1.57	T-27	2.5 1.13
1 11/16 1 3/4	45	2-111T 2-112T 5209TMC	7901 35144	3.3465 85	1 3/16 30.2	1 3/32 27.8	7/16 11.1	19/64 7.5	2 50.8	2 15/16 74.6	2 19/64 58.3	.062 1.57	T-27	2.5 1.13
1 15/16 2	50	2-115T 1-2T 5210TMC	7889 35090	3.5433 90	1 9/32 32.5	1 1/8 28.6	9/16 14.3	17/64 6.7	2 3/32 53.2	3 3/8 85.7	2 15/32 62.7	.062 1.57	T-30	3.0 1.36
2		2-2T	9752 43377	3.9370 100	1 5/16 33.3	1 3/16 30.2	9/16 14.3	19/64 7.5	2 1/4 57.2	3 1/2 88.9	2 23/32 69.1	.080 2.03	T-30	3.4 1.54
2 1/8 2 3/16	55	2-22T 2-23T 5211TMC	9752 43377	3.9370 100	1 5/16 33.3	1 3/16 30.2	9/16 14.3	19/64 7.5	2 1/4 57.2	3 5/8 92.1	2 23/32 69.1	.080 2.03	T-30	3.4 1.54
2 1/4		2-24T	11789 52437	4.3307 110	1 9/16 39.7	1 1/4 31.8	11/16 17.5	21/64 8.3	2 5/8 66.7	4 1/16 103.2	2 63/64 75.8	.080 2.03	T-45	4.9 2.22
2 3/8 2 7/16	60	2-26T 2-27T 5212TMC	11789 52437	4.3307 110	1 9/16 39.7	1 1/4 31.8	11/16 17.5	21/64 8.3	2 5/8 66.7	4 1/8 104.8	2 63/64 75.8	.080 2.03	T-45	4.9 2.22

Metric dimensions for reference only.
Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.
For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.