
Standard Duty Support Grips

Offset Eye, Single Weave, Tin-Coated Bronze and Stainless Steel

IMPORTANT:
Read all breaking strength, safety and technical data relating to this product.

Refer to pages V-33 and V-34.


Offset Eye, Closed Mesh

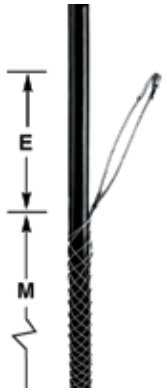

For permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. Tin-Coated Bronze	Approx. Breaking Strength Lbs. Stainless Steel	Working Load Lbs. Tin-Coated Bronze	Working Load Lbs. Stainless Steel	E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
.50"-.62" (1.27-1.57)	530	1,370	53	137	4" (10.16)	10" (25.40)	**02201037**	**02401037**
.63"-.74" (1.60-1.88)	750	1,950	75	195	4" (10.16)	10" (25.40)	**02201038**	**02401038**
.75"-.99" (1.90-2.51)	950	2,060	95	206	4" (10.16)	13" (33.02)	**02201039**	**02401039**
1.00"-1.24" (2.54-3.15)	1,500	2,678	150	268	5" (12.70)	14" (35.56)	**02201041**	**02401041**
1.25"-1.49" (3.17-3.78)	1,500	4,490	150	449	5" (12.70)	15" (38.10)	**02201042**	**02401042**
1.50"-1.74" (3.81-4.42)	1,500	3,700	150	370	5" (12.70)	17" (43.18)	**02201043**	**02401043**
1.75"-1.99" (4.44-5.05)	2,000	4,375	200	437	6" (15.24)	19" (48.26)	**02201044**	**02401044**
2.00"-2.49" (5.08-6.32)	3,100	5,500	310	550	9" (22.86)	21" (53.34)	**02201045**	**02401045**
2.50"-2.99" (6.35-7.59)	3,100	—	310	—	9" (22.86)	23" (58.42)	**02201046**	**—**
3.00"-3.49" (7.62-8.86)	3,800	—	380	—	11" (27.94)	25" (63.50)	**02201047**	**—**
3.50"-3.99" (8.89-10.13)	3,250	—	325	—	11" (27.94)	27" (68.58)	**02201048**	**—**


Offset Eye, Split Mesh, Lace Closing

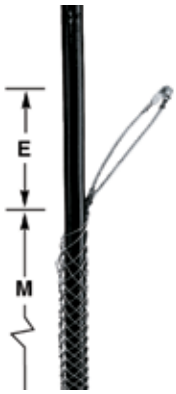

For permanent support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N) Tin-Coated Bronze	Approx. Breaking Strength Lbs. (N) Stainless Steel	Working Load Lbs. Tin-Coated Bronze	Working Load Lbs. Stainless Steel	E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
.50"-.62" (1.27-1.57)	500	—	50	—	4" (10.16)	10" (25.40)	**02202037**	**—**
.63"-.74" (1.60-1.88)	750	1,952	75	195	4" (10.16)	10" (25.40)	**02202038**	**02402038**
.75"-.99" (1.90-2.51)	950	—	95	—	4" (10.16)	13" (33.02)	**02202039**	**—**
1.00"-1.24" (2.54-3.15)	1,500	—	150	—	5" (12.70)	14" (35.56)	**02202041**	**—**
1.25"-1.49" (3.17-3.78)	1,500	4,490	150	449	5" (12.70)	15" (38.10)	**02202042**	**02402042**
1.50"-1.74" (3.81-4.42)	1,500	—	150	—	5" (12.70)	17" (43.18)	**02202043**	**—**
1.75"-1.99" (4.44-5.05)	1,800	4,375	180	437	6" (15.24)	19" (48.26)	**02202044**	**02402044**
2.00"-2.49" (5.08-6.32)	2,150	5,500	215	550	9" (22.86)	21" (53.34)	**02202045**	**02402045**
2.50"-2.99" (6.35-7.59)	2,150	5,500	215	550	9" (22.86)	23" (58.42)	**02202046**	**02402046**
3.00"-3.49" (7.62-8.86)	3,250	10,190	325	1,019	11" (27.94)	25" (63.50)	**02202047**	**02402047**
3.50"-3.99" (8.89-10.13)	3,250	—	325	—	11" (27.94)	27" (68.58)	**02202048**	**—**

Offset Eye, Split Mesh, Rod Closing

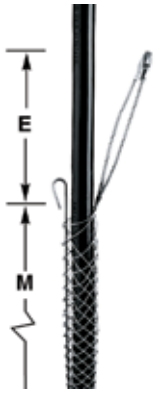

For support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N) Tin-Coated Bronze	Approx. Breaking Strength Lbs. (N) Stainless Steel	Working Load Lbs. Tin-Coated Bronze	Working Load Lbs. Stainless Steel	E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
.50"-.62" (1.27-1.57)	500	1,000	50	100	4" (10.16)	7" (17.78)	**02203037**	**02403037**
.63"-.74" (1.60-1.88)	750	1,950	75	195	4" (10.16)	9" (22.86)	**02203038**	**02403038**
.75"-.99" (1.90-2.51)	950	1,950	95	195	4" (10.16)	10" (25.40)	**02203039**	**02403039**
1.00"-1.24" (2.54-3.15)	1,500	2,500	150	250	5" (12.70)	12" (30.48)	**02203041**	**02403041**
1.25"-1.49" (3.17-3.78)	1,500	4,200	150	420	5" (12.70)	14" (35.56)	**02203042**	**02403042**
1.50"-1.74" (3.81-4.42)	1,500	4,500	150	450	5" (12.70)	15" (38.10)	**02203043**	**02403043**
1.75"-1.99" (4.44-5.05)	2,000	4,375	200	437	6" (15.24)	16" (40.64)	**02203044**	**02403044**
2.00"-2.49" (5.08-6.32)	3,100	8,350	310	835	9" (22.86)	19" (48.26)	**02203045**	**02403045**
2.50"-2.99" (6.35-7.59)	3,100	—	310	—	9" (22.86)	20" (50.80)	**02203046**	**—**
3.00"-3.49" (7.62-8.86)	4,300	8,400	430	840	11" (27.94)	21" (53.34)	**02203047**	**02403047**
3.50"-3.99" (8.89-10.13)	4,900	—	490	—	11" (27.94)	21" (53.34)	**02203048**	**—**

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)