▼ Shown: **PRASA10027L and Accessory Locking U-Rings**



Safe, Efficient, Mobile Load Lifting

- **60, 100, 150 and 200-ton capacities with pneumatic or electric pumps for the toughest jobs**
- **4-inch ground clearance for transport over rail and rough terrain**
- **Three-position handle provides easy tilt back and transport**
- **Complies with ASME/ANSI B30.1:2015 & CE specifications**
- **Easy-to-change external filter minimizes down time**
- **Rugged, fully enclosed 24-inch wide frame with no exposed fittings or hoses**
- **SUP-R-STACK™ Extension System allows lifting at all heights without blocking.**

Pendant Cord

Standard 12 ft. pendant cord for air driven units with pneumatic valves and 20 ft. pendant cord for electric driven units keeps operator away from the load.



POW'R LOCK – Self-Locking Mobile Lift System

A self-locking jack that performs automatic locking during lifting, lowering and holding. See the Enerpac PL-Series.

Page: **70**



◀ *Enerpac POW'R-RISER® used in mining operations to lift heavy equipment.*

Capacity (ton)	Stroke (in)	Electric Pump Model Number (115 VAC)	Weight (lbs)
60	14	**PREMB06014L**	390
	27	**PREMB06027L**	600
100	16	**PREMB10016L**	510
	27	**PREMB10027L**	600
	16	-	-
	27	-	-
150	15.5	-	-
	26.5	-	-
	15.5	**PREMB15016L**	570
	26.5	**PREMB15027L**	708
200	15.3	-	-
	24.3	-	-

(PR-Series not available in Canada. Contact Enerpac.)



SUP-R-STACK™ Extensions

Increase useful height from 5" to 18".

Model No.	Size (in)	Model No.	Size (in)
PRE5	5	PRE11	11
PRE7	7	PRE14	14
PRE9	9	PRE18	18
PRES6024	Extension set includes **PRE5, PRE7, PRE11PRE18**		



Spacers

Fine tune your Extension stack height.

Model No.	Size (in)	Model No.	Size (in)
PRS1	1	PRS3	3
PRS2	2	–	–
PRS4	Set includes (2) **PRS1,** (1) **PRS2** and (1) **PRS3**		

PR Series



Rated Lifting Capacity:
60 - 200 tons

Stroke:
14 - 27 inches

Maximum Operating Pressure:
10,000 psi


Cap. (ton)	Swivel Load Cap	Locking U-Rings: 1 in.	3 in.	4¼ in.	5½ in.	10 in.	Set Model Number	Locking U-Ring Sets Include (quantity and model numbers) 2X	1X	2X	1X
60	PRTS60	PRU11	PRU13	PRU14	–	PRU110	[1] PRUS126	PRU11	PRU13	PRU14	–
							[2] PRUS137	PRU11	PRU13	PRU14	PRU10
100	PRTS60	PRU11	PRU13	PRU14	–	PRU110	[1] PRUS126	PRU11	PRU13	PRU14	–
							[2] PRUS137	PRU11	PRU13	PRU14	PRU110
150	PRTS150	PRU151	PRU153	–	PRU155	PRU1510	[3] PRUS1526	PRU151	PRU153	PRU155	–
							[2] PRUS1537	PRU151	PRU1510	PRU155	–
200	PRTS200	PRU201	PRU203	–	PRU205	PRU2010	[3] PRUS2026	PRU201	PRU203	PRU205	–
							[2] PRUS2037	PRU201	PRU2010	PRU205	–

[1] For 14 and 16" stroke models
[2] For 27" stroke models
[3] For 15.5" stroke models

WARNING!

Extensions: Any two Extensions may be stacked for loads up to 60 tons. For loads over 60 tons or strokes over 14" only one Extension and one Spacer can be used.

Spacers: Never exceed 3" in total Spacer height.

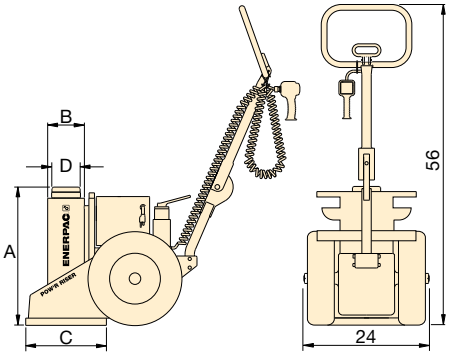



Locking U-Rings

For safe mechanical cribbing of a lifted load, accessory Locking U-Rings can be placed around an extended piston and come in four lengths for each POW'R-Riser® capacity, and are available individually or in sets. Locking U-Rings are accommodated by storage racks integral to the POW'R-Riser®.

	Air Pump	Weight (lbs)	A (in)	B (in)	C (in)	D (in)	Max. Additional Stack Height Using Optional Ext. System (in)	Valve Type
	PRAMA06014L	390	24	6.4	14	4	32*	Manual
	PRAMA06027L	600	37	6.4	14	4	11	
	PRAMA10016L	510	26	7.0	18	4	21**	
	PRAMA10027L	600	37	7.0	18	4	11	
	PRASA10016L	510	26	7.0	18	4	21**	Pneumatic
	PRASA10027L	600	37	7.0	18	4	11	
	PRASA15016L	570	26	8.0	18	5	21**	
	PRASA15027L	708	37	8.0	18	5	11	
	-	-	26	8.0	18	5	21**	Manual
	-	-	37	8.0	18	5	11	
	PRASA20016L	640	26	9.5	20	6	21**	Pneumatic
	PRASA20027L	825	37	9.5	20	6	11	

* Based on one 18" and one 11" Extension and one 3" Spacer.
** Based on one 18" Extension and one 3" Spacer.

For power source, the following characters should be inserted in the 5th space of the model number.

Ordering Example:
Model No. PREMI06014L is a 14" stroke, 60 ton model, with a manual valve and a 208-240 VAC, 1-ph electric motor.

A Air Pump, 50 scfm, 80 psi
B 115 VAC, 1ph., 50-60 Hz, 20 A
E 208-240 VAC, 1-ph., 50-60 Hz, Euro Plug, 10 A
I 208-240 VAC, 1-ph., 50-60 Hz, USA Plug, 10 A
G [1] 208-240 VAC, 3-ph., 50-60 Hz
W [1] 380-415 VAC, 3-ph., 50-60 Hz
J [1] 440-480 VAC, 3-ph., 50-60 Hz
R [1] 575 VAC, 3-ph., 50-60 Hz

[1] Not available for 60-ton capacity