PR4-07-20D2



Color: Bronze

Weight: 175.3 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Compliance

CSA Listed:
Suitable for wet locations

Performance

Description:
Steel pole 4" round 7 gauge 20 foot drilled two sides square base

Construction

Shaft:
46,000 p.s.i. minimum yield.

Hand Holes:
Reinforced with grounding lug and removable cover

Base Plates:
36,000 p.s.i. minimum yield.

Color:
Bronze powder coating

Height:
20 ft

Gauge:
7

Wall Thickness:
3/16"

Shaft Size:
4"

Anchor Bolt Templates:
WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available online.

Max EPA's/Max Weights:
70MPH 14.9 ft/410 lb.
80MPH 10.7 ft/350 lb.
90MPH 7.8 ft/165 lb.
100MPH 5.8 ft/130 lb.
110MPH 4.2 ft/70 lb.
120MPH 3.1 ft/60lb.
130MPH 2.1 ft/50 lb.
140MPH 1.4 ft/50 lb.
150MPH 0.8 ft/20 lb

Accessories:
Base/Cap: BCK-R4
Anchor Bolts: BOLT4/7

Other

Terms of Sale:
Pole Terms of Sale is available online.

Buy American Act Compliance:
RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

PR4-07-20D2

Dimensions

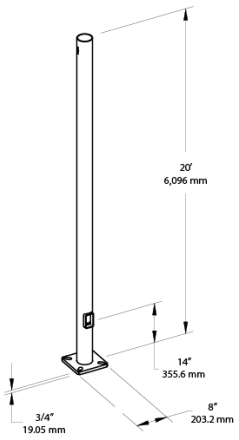

Features

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
P	R	4	7	20	D2
	R = Round **TR =** Tapered Round	**4 =** 4" **5 =** 5" **6 =** 6" **7 =** 7" **8 =** 8"	**7 =** 7 **11 =** 11	**10 =** 10' **15 =** 15' **20 =** 20' **25 =** 25' **30 =** 30'	**D2 =** Drilled **WT =** Welded Tenon

Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice