EXIT-R



Color: White

Weight: 3.0 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:
Exit Sign

Description:
Exit sign with remote capability and 90-minute emergency battery backup unit.

Input Wattage:
3.7W @120V; 3.8W @277V

Electrical

Power Factor:
≥0.9

Input Voltage:
Dual 120/277 Voltage

Operating Frequency (Hz):
60Hz

Input Current @ 120V (mA):
40mA

Input Current @ 277V (mA):
20mA

Dual Voltage Circuit Operation:
No

Operating Temperature:
32°F to 104°F (0°C to 40°C)

Emergency Illumination:
90 minutes

Battery Backup:
Yes

Battery Type:
Nickel Cadmium

Battery Voltage:
9.6V

Recharge Time Required:
24-hours

Battery Operating Temperature:
32°C to 104°C (0°F to 40°F)

Storage Temperature:
68°F to 86°F (20°C to 30°C)

Storage Shelf Life:
3 years before the initial charge. 5 years after initial charge.

Self Diagnostics:
No, manual test only

Remote Test Switch:
No

Installation

Mounting Method:
Back/Top

Mounting Type:
Wall/Ceiling Mount

Cold Weather Rated:
No

Construction

Shape:
Rectangle

Housing Material:
Thermoplastic

Panel Material:
Thermoplastic

Panel Color:
White

Letter Color:
Red

Housing Color:
White

Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Technical Specifications (continued)

Number of Faces:
Universal Single/Double Face

Arrow Direction:
No Arrow

Sign Format:
Stencil

Remote Capacity:
Yes

Compliance

Listings:
None

Environment:
Suitable for indoor use in dry and damp environments

IP Rating:
Indoor

Certification Model Number:
LEDCXTEU2RW-NH

T20 Compliant:
Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:
Not applicable

California Energy Commission (CEC) Status:
Lawful for Sales in California

FCC:
Complies with Part 15 of the FCC Rules

Other

Compatible Products:
EREMOTE-1
Single remote head
EREMOTE-1H
Single remote head high-output
EREMOTE
Double remote head
EREMOTE-H
Double remote head high-output
EREMOTE-1HB
Single remote head high-output, black
EREMOTE-B
Single remote head, black
EREMOTEOUT-1
Single remote head, outdoor
EREMOTEOUT
Double remote head, outdoor
EREMOTEOUT-1H
Single remote head high-output, outdoor
EREMOTEOUT-H
Double remote head high-output, outdoor
EREMOTEOUT-1HB
Single remote head high-output, black, outdoor
EREMOTEOUT-HB
Double remote head high-output, outdoor

Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.
Battery is prorated.


Note:
All values are typical (tolerance +/- 10%)

Buy American Act Compliance:
RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

EXIT-R

Dimensions

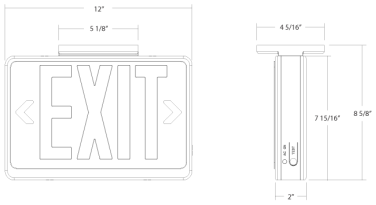

Features

- Double-face panel with red letters
- Durable thermoplastic design
- 90 minutes of battery backup
- N/A
- Compliant with California Title 20

Ordering Matrix

Family	Face	Exit Sign Letter Color	Arrows	Housing	State	Battery Backup	Remote Capable
EXIT							R
	1 = 1 Face **Blank =** Universal Faces	**Blank =** Red **G =** Green	**LRA =** Left Right Arrow **RA =** Right Arrow **LA =** Left Arrow **DA =** Double Arrow **Blank =** No Arrow	**Blank =** White Housing	**Blank =** Standard **CH =** Chicago **NY =** New York	**Blank =** No Battery Backup **/E =** Battery Backup	**Blank =** No Remote Capable **R =** Remote Capable

Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice