# EXIT-DACH/E




Color: White

Weight: 4.9 lbs

| | |
|---|---|
| **Project:** | **Type:** |
| **Prepared By:** | **Date:** |

## Technical Specifications

### Performance

**Product Type:**
Chicago-Approved Steel Exit/Stair Sign

**Description:**
Chicago-approved exit sign with a universal face, red letters, and 90 minutes of emergency battery backup.

**Input Wattage:**
5W @120V and 277V

### Electrical

**Power Factor:**
≥0.4

**Input Voltage:**
Dual 120/277 Voltage

**Operating Frequency (Hz):**
60Hz

**Input Current @ 120V (mA):**
10mA

**Input Current @ 277V (mA):**
50mA

**Dual Voltage Circuit Operation:**
No

**Operating Temperature:**
32°F to 122°F (0°C to 50°C)

**Emergency Illumination:**
120 minutes

**Battery Backup:**
Yes

**Battery Type:**
Nickel Cadmium

**Battery Voltage:**
4.8V

**Recharge Time Required:**
24-hours

**Battery Operating Temperature:**
32°C to 122°C (0°F to 50°F)

**Storage Temperature:**
68°F to 86°F (20°C to 30°C)

**Storage Shelf Life:**
3 years before the initial charge. 5 years after initial charge.

**Self Diagnostics:**
No, manual test only

**Remote Test Switch:**
No

### Installation

**Mounting Method:**
Top/End

**Mounting Type:**
Wall/Ceiling Mount

**Cold Weather Rated:**
No

### Construction

**Shape:**
Rectangle

**Housing Material:**
Steel Sheet

**Panel Material:**
Glass

**Panel Color:**
White

**Letter Color:**
Red

**Housing Color:**
White


Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

## Technical Specifications (continued)

**Number of Faces:**
Universal Single/Double Face

**Arrow Direction:**
Double Arrow

**Sign Format:**
Panel

**Remote Capacity:**
No

### Compliance

**Listings:**
UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

**Environment:**
Suitable for indoor use in dry and damp environments

**IP Rating:**
Indoor

**Certification Model Number:**
CAXTEU2RWEM-DA

**T20 Compliant:**
Can be used to conform with the requirements of California Title 20

**California Title 24 JA8 Compliant:**
Not applicable

**California Energy Commission (CEC) Status:**
Lawful for Sales in California

**City Compliance:**
Chicago Approved

**FCC:**
Complies with Part 15 of the FCC Rules

### Other

**Warranty:**
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.
Battery is prorated.

**Note:**
All values are typical (tolerance +/- 10%)

**Buy American Act Compliance:**
RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.


Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

# EXIT-DACH/E

## Dimensions

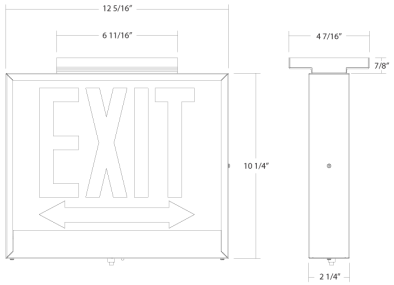


## Features

- Double-face panel with red letters
- Steel housing
- Approved for use in the city of Chicago
- Compliant with California Title 20

## Ordering Matrix

| Family | Face | Exit Sign Letter Color | Arrows | Housing | State | Battery Backup | Remote Capable |
|---|---|---|---|---|---|---|---|
| EXIT | | | DA | | CH | /E | |
| | **1 =** 1 Face<br>**Blank =** Universal Faces | **Blank =** Red<br>**G =** Green | **LRA =** Left Right Arrow<br>**RA =** Right Arrow<br>**LA =** Left Arrow<br>**DA =** Double Arrow<br>**Blank =** No Arrow | **Blank =** White Housing | **Blank =** Standard<br>**CH =** Chicago<br>**NY =** New York | **Blank =** No Battery Backup<br>**/E =** Battery Backup | **Blank =** No Remote Capable<br>**R =** Remote Capable |


Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice