

140 Sprockets

1 3/4" Pitch

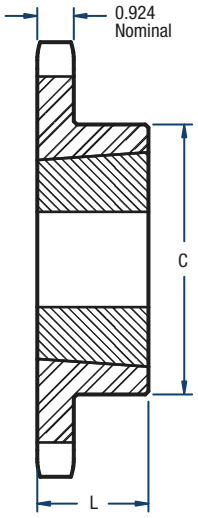

TL - TYPE B

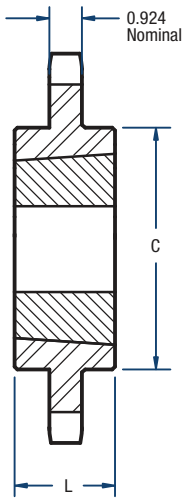

TL - TYPE C

Single- TL Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Max. Bore	Dimensions (in)		Approx. Weight (lbs)	
			Outside	Pitch			L	C	Bushing Only	Sprocket Only
12	**H140BTL12**	**2517**	**7.58**	**6.762**	**B**	**2-1/2**	**1-3/4**	**4-1/4**	**3.0**	**7.0**
13	H140BTL13	3020	8.15	7.313	B	3	2	5-1/4	5.4	8.0
14	**H140BTL14**	**3020**	**8.72**	**7.865**	**B**	**3**	**2**	**5-1/4**	**5.4**	**10.0**
15	H140BTL15	3020	9.28	8.418	B	3	2	5-1/4	5.4	12.0
16	**H140BTL16**	**3020**	**9.85**	**8.971**	**B**	**3**	**2**	**5-1/4**	**5.4**	**14.0**
17	H140BTL17	3020	10.41	9.524	B	3	2	5-1/4	5.4	16.0
18	**H140BTL18**	**3020**	**10.97**	**10.078**	**B**	**3**	**2**	**5-1/4**	**5.4**	**18.0**
19	H140BTL19	3020	11.54	10.633	B	3	2	5-1/4	5.4	20.0
21	**H140BTL21**	**3020**	**12.66**	**11.743**	**B**	**3**	**2**	**5-1/4**	**5.4**	**24.0**
26	H140BTL26	3020	15.46	14.518	B	3	2	5-1/4	5.4	40.0
35	**140BCTL35**	**3535**	**20.49**	**19.523**	**C**	**3-1/2**	**3-1/2**	**6-1/2**	**12.0**	**78.0**
45	140CTL45	4040	26.08	25.088	C	4	4	7-3/4	17.0	118.0
60	**140CTL60**	**4040**	**34.44**	**33.437**	**C**	**4**	**4**	**7-3/4**	**17.0**	**188.0**
70	140CTL70	4040	40.02	39.006	C	4	4	7-3/4	17.0	241.0

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.

Blackstar sprockets are a product of Baart Industrial Group (Baart). All rights reserved. ©2019
While Baart has tried to ensure the accuracy of the information contained in this document, Baart accepts no responsibility for inaccurate, or changes to, such information.