



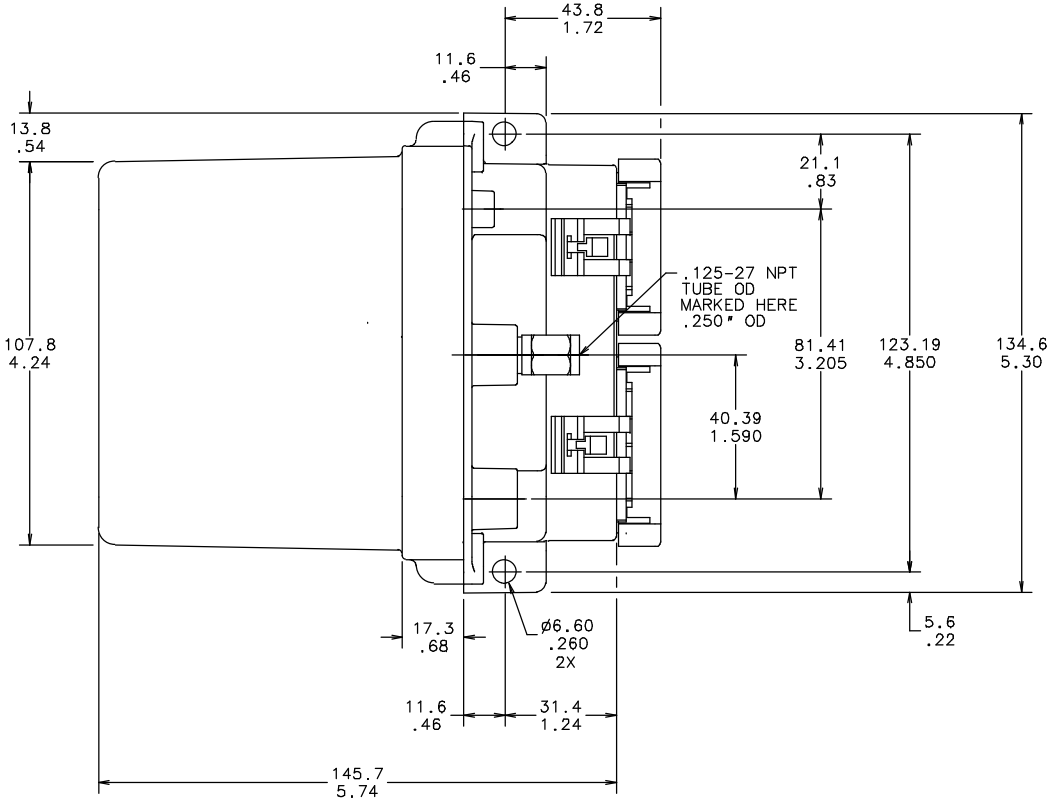

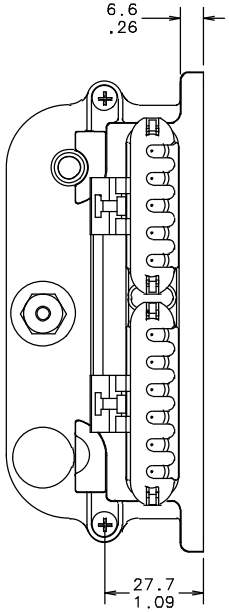

NOT SHOWN: COMMUNICATIONS CABLE
APPROXIMATE CABLE LENGTH 1.5M
59 INCHES

GEOMETRIC TOLERANCE VALUES	
MM	INCH
.013	.0005
.03	.001
.05	.002
.08	.003
.13	.005
.20	.008
.25	.010
.38	.015

THIRD ANGLE PROJECTION

SURFACE ROUGHNESS VALUES	
µm	µin
6.3	250
3.2	125
1.6	63
0.8	32
0.4	16
0.2	8

UNLESS OTHERWISE SPECIFIED

1. SURFACE TEXTURE: √
2. METRIC TOLERANCES: X ±0.8; .X ±0.5; .XX ±0.13
   INCH TOLERANCES: .XX ±.02; .XXX ±.005
3. ANGLES ±.5°
4. PRIMARY DIMENSIONS ARE IN MM
   SECONDARY DIMENSIONS ARE IN INCHES
5. REMOVE ALL BURRS AND SHARP EDGES
6. DO NOT SCALE DWG - WORK TO DIMS
7. PART MUST CONFORM TO ENGINEERING STANDARD WORK INSTRUCTIONS

nexen® Nexen Group, Inc.

TITLE GENERAL DIMENSIONS

MODEL RSD200P,MODBUS

MATL		B	17238		10-26-05
MATL #		REV	ECO	ERO	DATE
DWN SHO	DATE 09-10-04	SCALE:NONE		WAS C-964536S-A	
CHKD PAR	DATE 09-10-04	SHEET 1 OF 1			REV
APVD BRB	DATE 09-10-04	C-964536S			B

C-964536S