Wired On Portable GFCI Plugs

Circuit Guard® Wired On Industrial Portable GFCI Plug

Description	Rating	Catalog Number
GFCI plug, manual set, black.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P	GFPST5266C
GFCI plug, manual set, yellow.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P	GFPST5266CY
GFCI plug with 1 foot line cord, manual set, yellow, with connector body.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P, NEMA 5-15R	GFPST1C

Circuit Guard Wired On Commercial Portable GFCI Plug

Description	Rating	Catalog Number
GFCI plug, automatic set, field wireable, black.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P	GFPST515A
GFCI plug, manual set, field wireable, black.	2 pole, 3 wire grounding, 15A, 125V, NEMA 5-15P	GFPST515M



GFPST5266C



GFPST1C




GFPST515A

Specifications


Trip Level	4 to 6 mA
Trip Time	.025 sec. nominal
Frequency	60 Hz
Voltage	120V AC +10% – 15%. Incorporates no voltage release feature
Amperage	15A
Maximum Interrupting Capacity	2,000A
Operating Temperature	-35°C to 66°C or -30°F to 150°F
Maximum Humidity	95%.
Housing	High-impact, UV stabilized material. UL94V-0 flammability classification
Input	NEMA 5-15P
Cord Range	16/3 – 12/3 Type SJ, 18/3 – 12/3 Type S
Cord Type: Length (GFP1C)	14/3 Type SJTW-A (UL), SJTW (CSA); 1 foot; NEMA 5-15R
Power "ON" Indication	Indicator light
Listings	Meets UL943 Class A Listed, CSA Certified
Codes	Meets all NEC® and CEC requirements

Product Dimensions

GFPST5266C Series

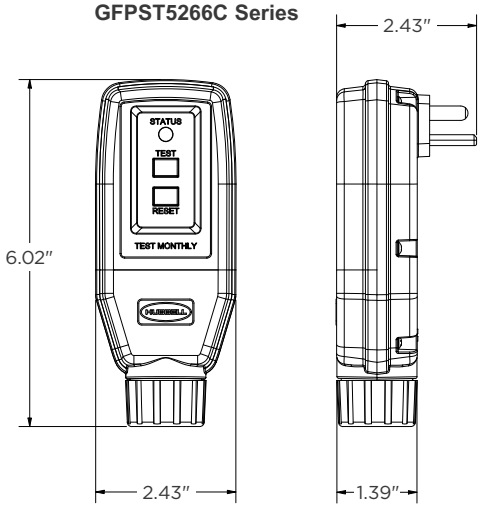

GFPST515 Series

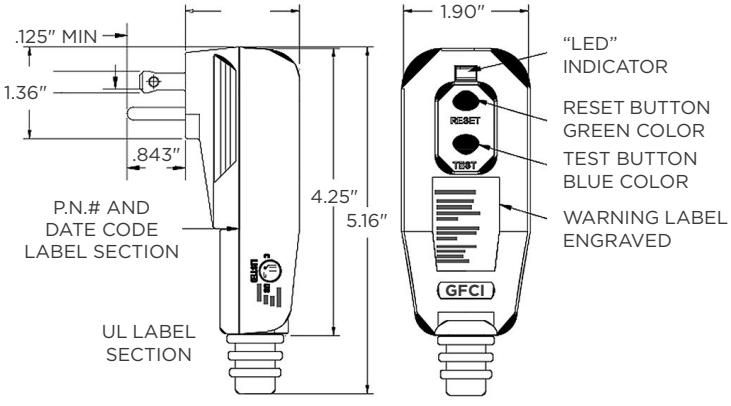

NEC® is a registered trademark of the National Fire Protection Association (NFPA).

Dimensions in Inches (mm)