EL2H



Product Shown
EL2H-W

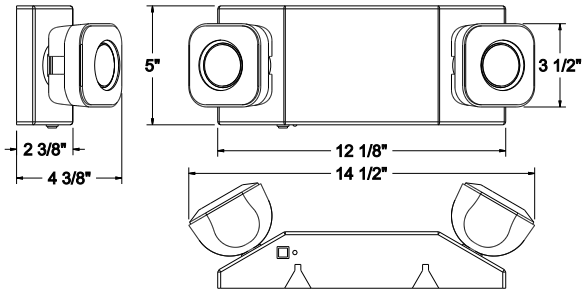

EMERGENCY LIGHT

- Dual-Voltage Input 120/277VAC Operation
- UL Listed for Damp Location
- Two fully adjustable, glare-free 6V 5W MR16 Halogen Lamps
- 90 Minutes Minimum Emergency Operation
- Injection Molded, 5VA Flame Retardant, High Impact, Thermoplastic
- Universal Mounting Pattern with Quick-Connect
- Conduit Mount Knockout on top of housing **(HO Only)**
- Suitable for wall and ceiling mounting
- Push to Test Switch
- Maintenance free 6V, 4.5AH (HO: 7AH) Sealed Lead-Acid Battery
- Fully automatic operation
- Remote Capable for up to 2 additional Lamp Heads (10.8W Max) **(HO Only)**

Cat. No.	Housing Color	Options
EL2H	**W** (White) **B** (Black)	**HO** (High Output) **SDT** (Self Diagnostic Test)

EL2HM-LED NEW



Product Shown
EL2HM-LED-W

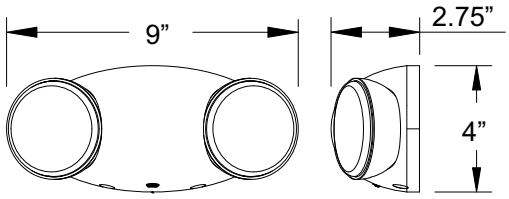

MICRO LED EMERGENCY LIGHT

- Dual-Voltage Input 120/277VAC Operation
- UL Listed for Damp Location
- Long-lasting, Energy Saving ultra-bright LED Lamps
- 90 Minutes Minimum Emergency Operation
- Injection Molded, 5VA Flame Retardant, High Impact, Thermoplastic
- Fully adjustable, glare-free Lamp Heads
- Universal Mounting Pattern with 1/2” Knockout
- Suitable for wall and ceiling mounting
- High Performance Chrome Plated Reflector
- Push to Test Switch
- Maintenance free 3.6V NiCd Battery
- Fully automatic operation

Cat. No.	Housing Color
EL2HM-LED	**W** (White) **B** (Black)