
Straight Blade Devices


15 and 20 Ampere, 125 Volts



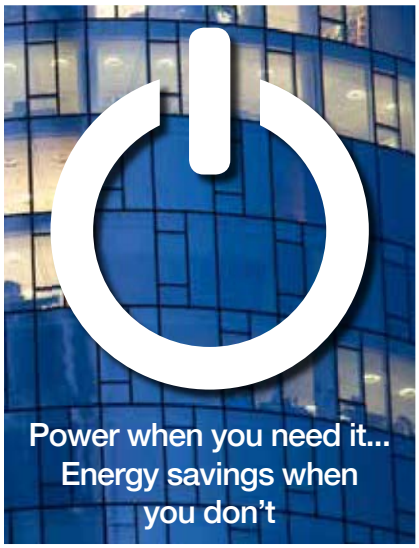


- Permanent power symbol remains clearly visible after installation
- Control both outlets per device for 100% controlled applications or just one outlet for 50% controlled applications
- Ideal for commercial buildings, retail, schools, hotel rooms
- Part of the Hubbell Load:Logic™ Plug Control system

SNAP*Connect*® Permanently Marked Receptacles



SNAP5362C1W


Duplex	Color	One Controlled Face Split Circuit Hot Tab 15 Amp	One Controlled Face Split Circuit Hot Tab 20 Amp	Two Controlled Faces 15 Amp	Two Controlled Faces 20 Amp
SNAP*Connect*® standard duplex, permanently marked for use with automatic plugload controls.	Black	**SNAP5262C1BK**	**SNAP5362C1BK**	**SNAP5262C2BK**	**SNAP5362C2BK**
	Blue	**SNAP5262C1BL**	**SNAP5362C1BL**	**SNAP5262C2BL**	**SNAP5362C2BL**
	Brown	**SNAP5262C1**	**SNAP5362C1**	**SNAP5262C2**	**SNAP5362C2**
	Gray	**SNAP5262C1GY**	**SNAP5362C1GY**	**SNAP5262C2GY**	**SNAP5362C2GY**
	Green	**SNAP5262C1GN**	**SNAP5362C1GN**	**SNAP5262C2GN**	**SNAP5362C2GN**
	Ivory	**SNAP5262C1I**	**SNAP5362C1I**	**SNAP5262C2I**	**SNAP5362C2I**
	Lt. Almond	**SNAP5262C1LA**	**SNAP5362C1LA**	**SNAP5262C2LA**	**SNAP5362C2LA**
	Red	**SNAP5262C1R**	**SNAP5362C1R**	**SNAP5262C2R**	**SNAP5362C2R**
	White	**SNAP5262C1W**	**SNAP5362C1W**	**SNAP5262C2W**	**SNAP5362C2W**
SNAP*Connect*® Tamper-Resistant, standard duplex, permanently marked for use with automatic plugload controls.	Black	**SNAP5262C1BKTRA**	**SNAP5362C1BKTRA**	**SNAP5262C2BKTRA**	**SNAP5362C2BKTRA**
	Brown	**SNAP5262C1TRA**	**SNAP5362C1TRA**	**SNAP5262C2TRA**	**SNAP5362C2TRA**
	Gray	**SNAP5262C1GYTRA**	**SNAP5362C1GYTRA**	**SNAP5262C2GYTRA**	**SNAP5362C2GYTRA**
	Green	**SNAP5262C1GNTRA**	**SNAP5362C1GNTRA**	**SNAP5262C2GNTRA**	**SNAP5362C2GNTRA**
	Ivory	**SNAP5262C1ITRA**	**SNAP5362C1ITRA**	**SNAP5262C2ITRA**	**SNAP5362C2ITRA**
	Lt. Almond	**SNAP5262C1LATRA**	**SNAP5362C1LATRA**	**SNAP5262C2LATRA**	**SNAP5362C2LATRA**
	White	**SNAP5262C1WTRA**	**SNAP5362C1WTRA**	**SNAP5262C2WTRA**	**SNAP5362C2WTRA**



SNAP2162C2I

Style Line® Decorator

SNAP*Connect*® decorator duplex, permanently marked for use with automatic plugload controls.	Black	**SNAP2152C1BK**	**SNAP2162C1BK**	**SNAP2152C2BK**	**SNAP2162C2BK**
	Blue	**SNAP2152C1BL**	**SNAP2162C1BL**	**SNAP2152C2BL**	**SNAP2162C2BL**
	Brown	**SNAP2152C1**	**SNAP2162C1**	**SNAP2152C2**	**SNAP2162C2**
	Gray	**SNAP2152C1GY**	**SNAP2162C1GY**	**SNAP2152C2GY**	**SNAP2162C2GY**
	Green	**SNAP2152C1GN**	**SNAP2162C1GN**	**SNAP2152C2GN**	**SNAP2162C2GN**
	Ivory	**SNAP2152C1I**	**SNAP2162C1I**	**SNAP2152C2I**	**SNAP2162C2I**
	Lt. Almond	**SNAP2152C1LA**	**SNAP2162C1LA**	**SNAP2152C2LA**	**SNAP2162C2LA**
	Red	**SNAP2152C1R**	**SNAP2162C1R**	**SNAP2152C2R**	**SNAP2162C2R**
	White	**SNAP2152C1W**	**SNAP2162C1W**	**SNAP2152C2W**	**SNAP2162C2W**
SNAP*Connect*® Tamper-Resistant, decorator duplex, permanently marked for use with automatic plugload controls.	Black	**SNAP2152C1BKTRA**	**SNAP2162C1BKTRA**	**SNAP2152C2BKTRA**	**SNAP2162C2BKTRA**
	Brown	**SNAP2152C1TRA**	**SNAP2162C1TRA**	**SNAP2152C2TRA**	**SNAP2162C2TRA**
	Gray	**SNAP2152C1GYTRA**	**SNAP2162C1GYTRA**	**SNAP2152C2GYTRA**	**SNAP2162C2GYTRA**
	Green	**SNAP2152C1GNTRA**	**SNAP2162C1GNTRA**	**SNAP2152C2GNTRA**	**SNAP2162C2GNTRA**
	Ivory	**SNAP2152C1ITRA**	**SNAP2162C1ITRA**	**SNAP2152C2ITRA**	**SNAP2162C2ITRA**
	Lt. Almond	**SNAP2152C1LATRA**	**SNAP2162C1LATRA**	**SNAP2152C2LATRA**	**SNAP2162C2LATRA**
	White	**SNAP2152C1WTRA**	**SNAP2162C1WTRA**	**SNAP2152C2WTRA**	**SNAP2162C2WTRA**



SNAP1RA

SNAP*Connect*® Right Angle Pigtailed Connector

Description	Solid Wire	Stranded Wire
Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2; Polycarbonate housing material.	**SNAP1RA**	**SNAP2RA**

Permanent Controlled Receptacle Label

Description	Catalog Number
For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling. 60 labels of each per pack.	**CL60**

Dimensions in Inches (mm)