
SSF3TS-100

Lock: Set Screw
Seal: Contact
Housing: Stamped Steel
Temperature: -20°F to 200°F
Inserts: LS-100
Dimensions pg 46

No Re-Lube

S STAMPED
S STEEL
F FLANGE
3 THREE BOLT
T TRIANGULAR
S SET SCREW

1 100
0 LIGHT
0 DUTY

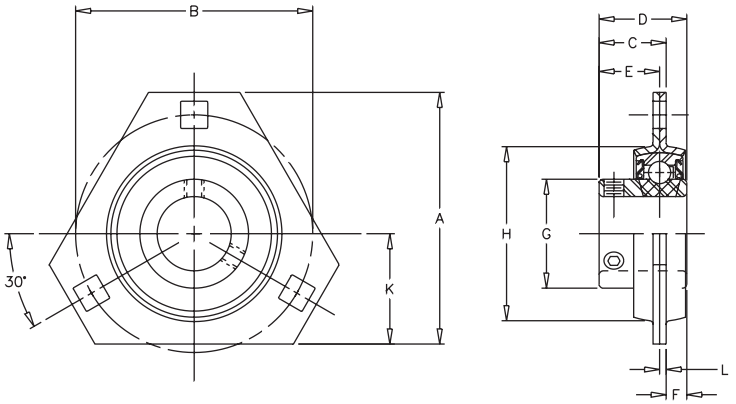

SHAFT DIA. IN.	MAX STEADY RADIAL LOAD LBS.	UNIT NO.	BRG. NO.	Dimensions In Inches										BOLT SIZE	UNIT WT.
				A	B	C	D	E	F	G	H	K	L		
3/4	700	SSF3TS-112	LS-112	3	2 13/16	51/64	1 1/16	23/32	11/32	1 3/16	2 1/32	1 5/16	.083	5/16	1.0
7/8		SSF3TS-114	LS-114												
15/16	800	SSF3TS-115	LS-115	3 1/8	3	27/32	1 7/64	49/64	11/32	1 3/8	2 7/32	1 3/8	.083	5/16	1.1
1		SSF3TS-116	LS-116												
1 1/8		SSF3TS-118	LS-118												1.3
1 3/16	1100	SSF3TS-119	LS-119	3 11/16	3 9/16	57/64	1 5/32	25/32	3/8	1 19/32	2 21/32	1 1/2	.104	3/8	
1 1/4		SSF3TS-120S	LS-120S												

CROSS REFERENCE TO COMPETITORS PRODUCTS

	REPLACES MB TFPS3-25	REPLACES SEALMASTER BRONZE TSSF	
	REPLACES LINK-BELT MSTR*		

Refer to Interchange Section Page 166 for more detail.
*-Bearing not included

See page 156 for trademark acknowledgments.