




SIDE

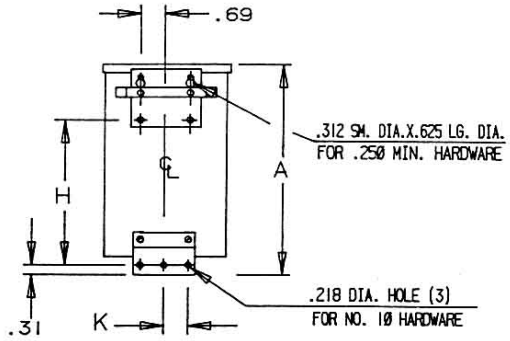


BACK (1)

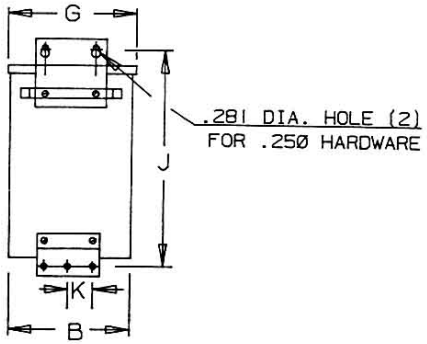

BACK (2)



BOTTOM

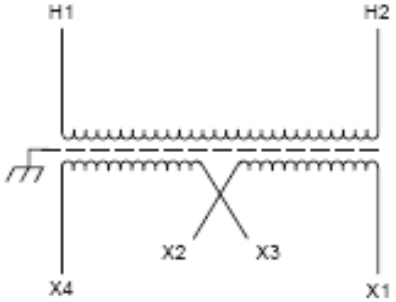

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	H1-H2		
Secondary Volts			
240		X2 to X3	X1-X4
120/240		X2 to X3	X1-X2-X4
120		X1 to X3 X2 to X4	X1-X4

KVA	CATALOG NUMBER	VOLTAGE		Enclosure Rating	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
0.25	**T-2-53107-S**	600	120/240	NEMA 3R	10 Lbs	1ϕ	50/60 Hz

Winding Rise	115°C
Insulation	180°C
Sound Level	40dB

TYPICAL PERFORMANCE DATA

Regulation @ 100% PF	

IMPEDANCE	

Typical Efficiency	
Full Load Losses	
No Load Losses	

A	B	C	D	E	F	G	H	J	K
8.20	3.90	3.88	1.30	3.67	7.36	4.08	4.70	8.68	.94

					A	PRINTS TO	**CONTROL 7**	

Revisions

Acme Electric®

Type No.