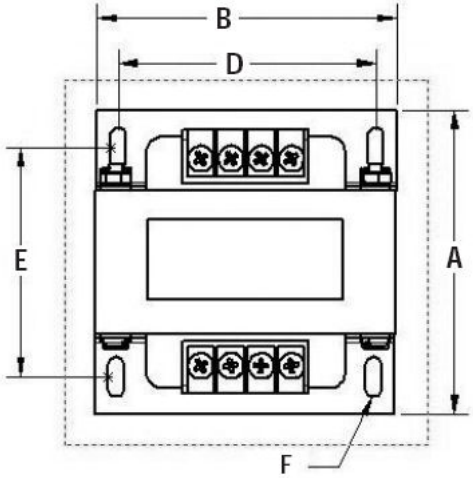



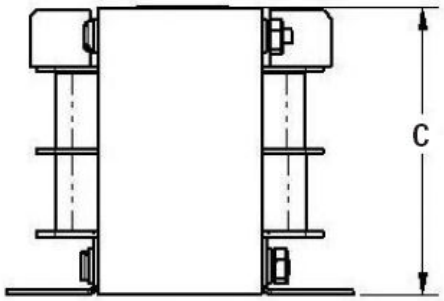

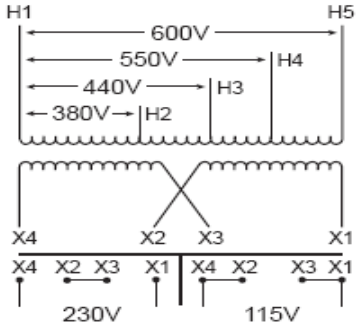

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
50	**TA-2-54535**	380/440/550/600	115/230		4 Lbs	1ϕ	50/60 Hz

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

TYPICAL PERFORMANCE DATA

Standards:	UL/CSA

Markings:	

Typical Efficiency·	
Full Load Losses	
No Load Losses	

Industrial Control Transformer

A	B	C	D	E	F				
4.12	3.75	3.21	3.13	2.19	.22x.50				

					A	PRINTS TO	CONTROL 7	

Revisions

Acme Electric®

Type No.

Date: May 21, 2010