




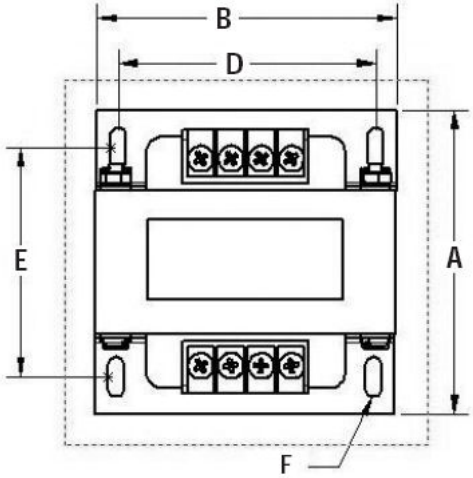

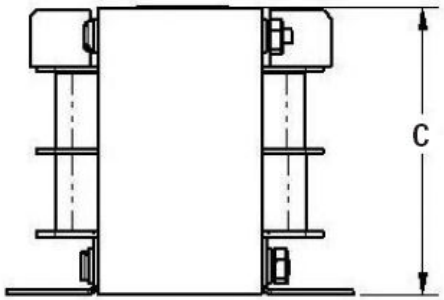

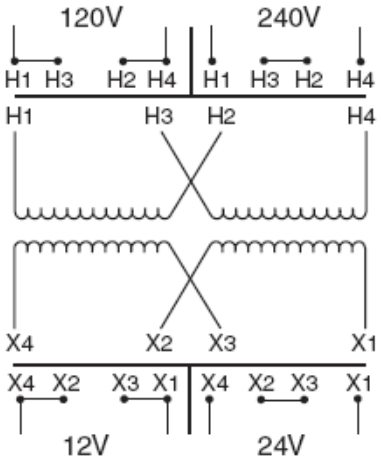

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
250	**TB1-81146**	120 x 240	12/24		9 Lbs	1ϕ	50/60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

Standards:	UL/CSA

Markings:	

Output Amps @24 volts	
Output Amps @12 volts	
No Load Losses	

Industrial Control Transformer

A	B	C	D	E	F				
5.08	4.50	3.84	3.75	3.05	.22 x .50				

Revisions

Primary Fuse Block

PL-112701

Secondary Fuse Kit

PL-112603

Acme Electric®

Type No.

Date: May 3, 2010

					A	PRINTS TO	**CONTROL 7**	