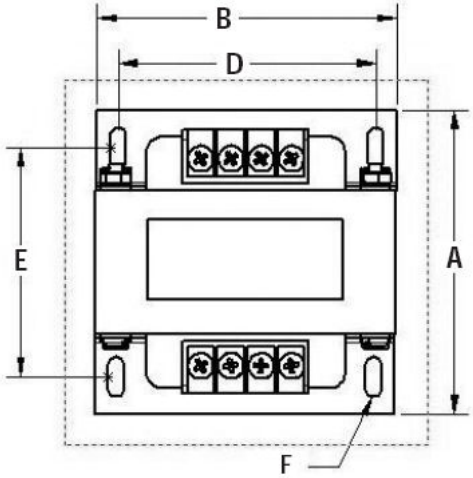



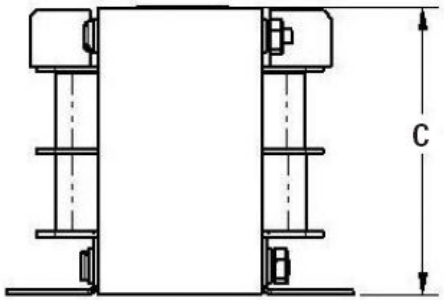

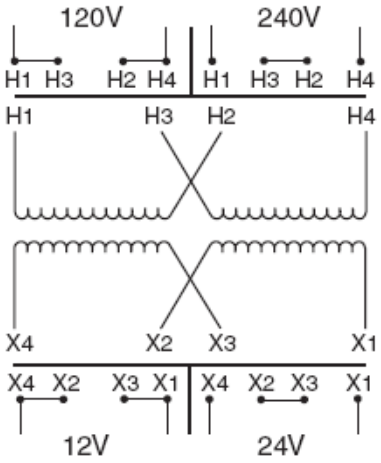

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
750	**TB1-81150**	120 x 240	12/24		24 Lbs	1ϕ	50/60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

Standards:	UL/CSA

Markings:	

Output Amps @24 volts	31.2 A
Output Amps @12 volts	62.5 A
No Load Losses	

Industrial Control Transformer

A	B	C	D	E	F				
7.53	5.25	4.47	4.38	5.25	.31 x .50				

Revisions

Primary Fuse Block

PL-112704

Secondary Fuse Kit

N/A

Acme Electric®

Type No.

Date: Feb 16, 2011

					A	PRINTS TO	**CONTROL 7**	