




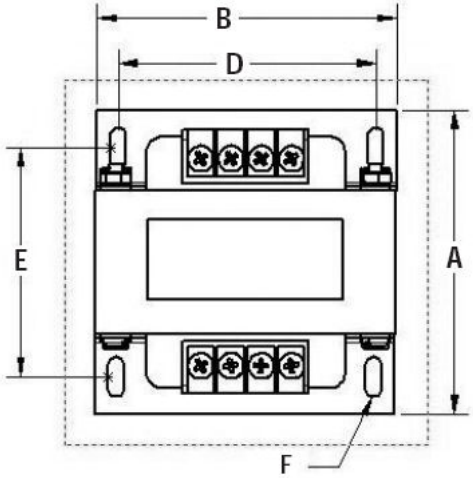

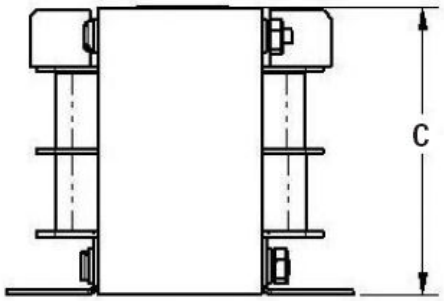

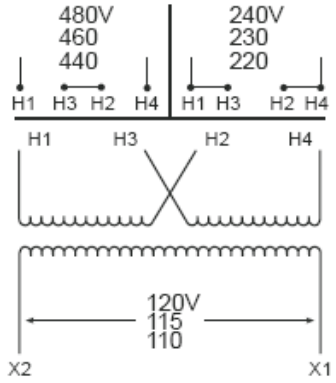

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
75	**TB-81201**	240 x 480	120		4 Lbs	1ϕ	50/60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

Standards:	UL/CSA

Markings:	

Typical Efficiency·	
Full Load Losses	
No Load Losses	

Industrial Control Transformer

A	B	C	D	E	F				
4.74	3.00	2.70	2.50	2.61	.22 x .50				

Revisions

Primary Fuse Block

PL-112702

Secondary Fuse Kit

PL-79930

Acme Electric®

Type No.

Date: August 11, 2010

					A	PRINTS TO	**CONTROL 7**	