
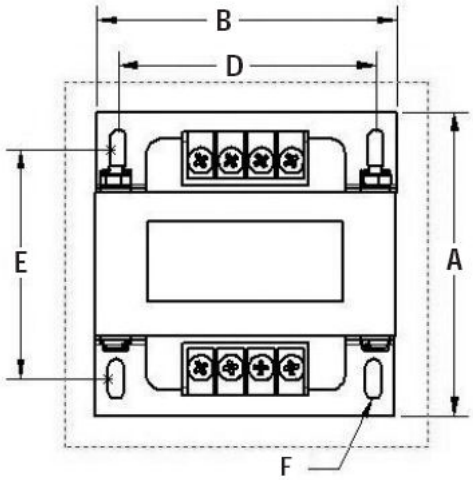
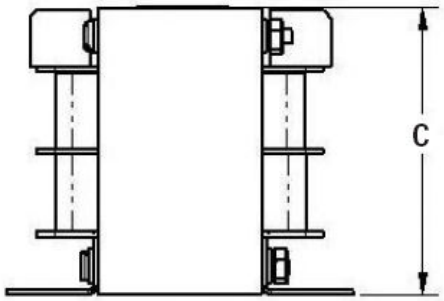


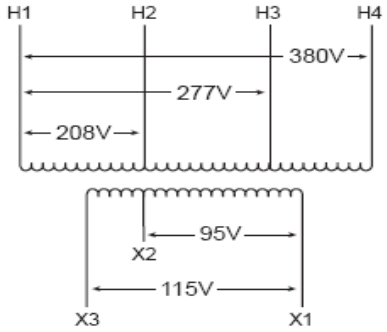


| VA | CATALOG NUMBER | VOLTAGE | | WIRING DIAGRAM | WEIGHT | PHASE | FREQ. |
|---|---|---|---|---|---|---|---|
| | | HIGH | LOW | | | | |
| 75 | **TB-81302** | 208/277/380 | 95/115 | | 4 Lbs | 1ϕ | 50/60 Hz |

TYPICAL PERFORMANCE DATA

| | |
|---|---|
| Winding Rise: | 80°C |
| Insulation: | 130°C |
| Windings: | CU |

| | |
|---|---|
| Standards: | UL/CSA |

| | |
|---|---|
| Markings: | |

| | |
|---|---|
| Typical Efficiency | |
| Full Load Losses | |
| No Load Losses | |

**Industrial Control Transformer**

| A | B | C | D | E | F | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 4.74 | 3.00 | 2.70 | 2.50 | 2.81 | .22x.50 | | | | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | | | | | A | PRINTS TO | CONTROL 7 | |

# Revisions

Acme Electric®

Type No.

Date: October 12, 2010