




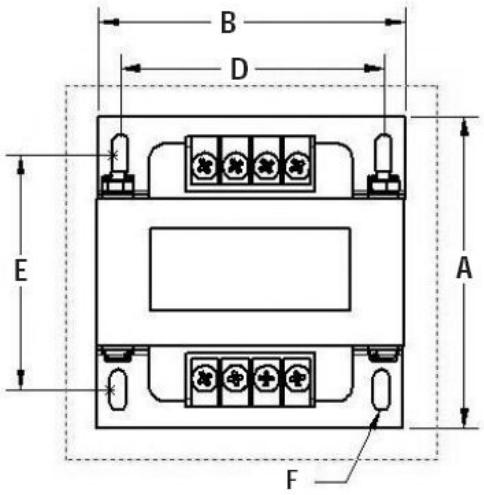

Group D

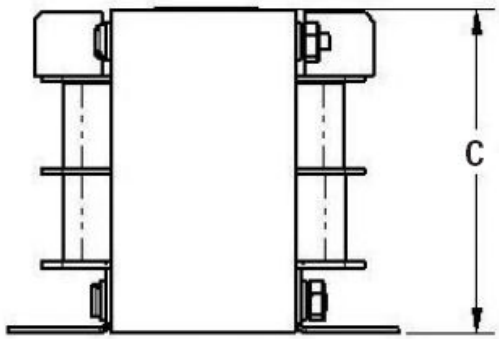



VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
250	**TB-81325**	208/240/277 380/480	24		11 Lbs	1ϕ	50/60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

Standards:	UL/CSA

Markings:	

Typical Efficiency·	
Full Load Losses	
No Load Losses	

Industrial Control Transformer

A	B	C	D	E	F				
5.24	4.65	4.15	4.06	3.25	.22x.50				

Revisions

Acme Electric®

Type No.

Date: Feb 21, 2011

					A	PRINTS TO	CONTROL 7	