




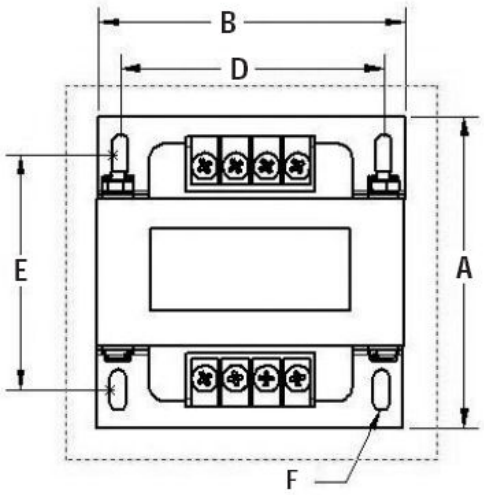

Group D

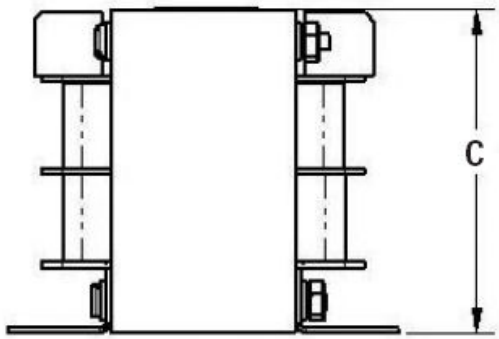



VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
750	**TB-81328**	208/240/277 380/480	24		26 Lbs	1ϕ	50/60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

Standards:	UL/CSA

Markings:	

Typical Efficiency·	
Full Load Losses	
No Load Losses	

Industrial Control Transformer

A	B	C	D	E	F				
7.08	6.75	5.78	5.75	3.81	.31x.50				

					A	PRINTS TO	CONTROL 7	

Revisions

Acme Electric®

Type No.

Date: October 27, 2009