
Browning®

Mounted Ball Bearings



Duty: Standard
Rolling Elements: Ball
Outer: Spherical O.D.
Lock: Eccentric
Seal: Contact and Flinger
Temperature: -20° to 200°F

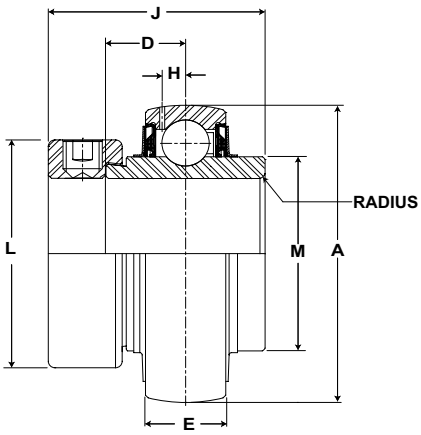

VE 200 Series Standard Duty Inserts - Eccentric Locking

Bore Diameter inch	Part No.	Basic Dynamic Rating lb/N	Dimensions inch / mm A	D	E	H	J	L	M	Max. Rad. To Clear	Setscrew Tap	Unit Wt. lb/kg
1/2 5/8	VE-208 VE-210	2108 9377	1.5748 40	35/64 13.9	.512 13	9/64 3.6	1 15/32 37.3	1 3/16 30.2	31/32 24.6	.055 1.4	1/4-28	.6 .27
3/4	VE-212	2611 11614	1.8504 47	43/64 17.1	.591 15	5/32 4.0	1 23/32 43.7	1 5/16 33.3	1 3/16 30.2	.070 1.8	1/4-28	.6 .27
7/8 15/16 1	VE-214 VE-215 VE-216	2801 12459	2.0472 52	11/16 17.5	.591 15	5/32 4.0	1 3/4 44.5	1 1/2 38.1	1 3/8 34.9	.070 1.8	1/4-28	.8 .36
1 1/8 1 3/16 1 1/4	VE-218 VE-219 VE-220S	4381 19487	2.4409 62	23/32 18.3	.709 18	13/64 5.2	1 29/32 48.4	1 3/4 44.5	1 19/32 40.5	.080 2.0	5/16-24	1.1 .50
1 1/4 1 3/8 1 7/16	VE-220 VE-222 VE-223	5782 25718	2.8346 72	3/4 19.1	.748 19	15/64 6.0	2 1/64 51.2	2 3/16 55.6	1 55/64 47.2	.080 2.0	3/8-24	1.4 .64
1 1/2	VE-224	7340 32648	3.1496 80	27/32 21.4	.866 22	17/64 6.7	2 7/32 56.4	2 3/8 60.3	2 1/16 52.4	.095 2.4	3/8-24	1.7 .77
1 5/8 1 11/16 1 3/4	VE-226 VE-227 VE-228	7901 35144	3.3465 85	27/32 21.4	.866 22	17/64 6.7	2 7/32 56.4	2 1/2 63.5	2 19/64 58.3	.110 2.8	3/8-24	1.8 .82
1 15/16	VE-231	7889 35090	3.5433 90	31/32 24.6	.906 23	9/32 7.1	2 15/32 62.7	2 3/4 69.9	2 15/32 62.7	.110 2.8	3/8-24	2.3 1.04
2 2 3/16	VE-232 VE-235	9752 43377	3.9370 100	1 3/32 27.8	.984 25	5/16 7.9	2 13/16 71.4	3 76.2	2 23/32 69.1	.125 3.2	7/16-20	3 1.36
2 1/4 2 7/16	VE-236 VE-239	11789 52437	4.3307 110	1 7/32 31.0	1.063 27	11/32 8.7	3 1/16 77.8	3 3/8 85.7	2 63/64 75.8	.125 3.2	7/16-20	4 1.81

Replacement collar part numbers can be found on page G-214.

Metric dimensions for reference only.
Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.
For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.