



Duty: Intermediate
Rolling Elements: Ball
Housing: Cast Iron Pillow Block – Low Base
Self Alignment: +/- 1.5 Degrees
Lock: Eccentric
Seal: Contact
Temperature: -20° to 200°F



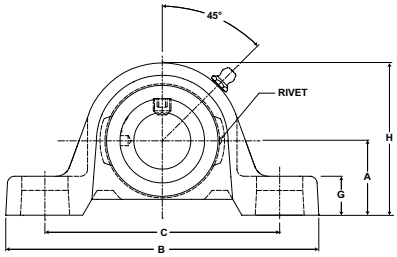



VPLE 100 Series Intermediate Duty Low Base Pillow Blocks - Eccentric Locking

Bore Diameter inch	Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm										Bolt Size	Unit Wt. lb/kg
				A	B	C min.	C max.	D	G	H	J	K	L		
1/2 5/8	VPLE-108 VPLE-110	VE-108 VE-110	2108 9377	1 1/16 27.0	4 7/8 123.8	3 1/8 79.4	4 1/8 104.8	1 7/32 31.0	11/32 8.7	2 3/32 53.2	1 3/16 30.2	7/8 22.2	1 3/16 30.2	3/8	.8 .36
3/4	VPLE-112	VE-112	2611 11614	1 1/4 31.8	5 127.0	3 15/32 88.1	4 9/32 108.7	1 11/32 34.1	15/32 11.9	2 15/32 62.7	1 17/64 32.1	59/64 23.4	1 5/16 33.3	3/8	1.4 .64
7/8 15/16 1	VPLE-114 VPLE-115 VPLE-116	VE-114 VE-115 VE-116	2801 12459	1 5/16 33.3	5 1/2 139.7	3 11/16 93.7	4 9/16 115.9	1 13/32 35.7	15/32 11.9	2 11/16 68.3	1 17/64 32.1	59/64 23.4	1 1/2 38.1	3/8	1.7 .77
1 1/8 1 3/16 1 1/4	VPLE-118 VPLE-119 VPLE-120S	VE-118 VE-119 VE-120S	4381 19487	1 9/16 39.7	6 3/16 157.2	4 3/16 106.4	5 1/16 128.6	1 3/4 44.5	17/32 13.5	3 5/32 80.2	1 27/64 36.1	1 3/64 26.6	1 3/4 44.5	1/2	2.8 1.27
1 1/4 1 3/8 1 7/16	VPLE-120 VPLE-122 VPLE-123	VE-120 VE-122 VE-123	5782 25718	1 13/16 46.0	6 3/4 171.5	4 5/8 117.5	5 3/8 136.5	1 3/4 44.5	21/32 16.7	3 5/8 92.1	1 37/64 40.1	1 5/32 29.4	2 3/16 55.6	1/2	3.7 1.68
1 1/2	VPLE-124	VE-124	7340 32648	1 15/16 49.2	7 1/8 181.0	4 7/8 123.8	5 7/8 149.2	1 15/16 49.2	3/4 19.1	3 15/16 100.0	1 49/64 44.8	1 9/32 32.5	2 3/8 60.3	1/2	4.8 2.18
1 11/16 1 3/4	VPLE-127 VPLE-128	VE-127 VE-128	7901 35144	2 1/16 52.4	7 3/8 187.3	5 7/16 138.1	5 7/8 149.2	2 50.8	11/16 17.5	4 3/16 106.4	1 49/64 44.8	1 9/32 32.5	2 1/2 63.5	1/2	5.6 2.54
1 15/16 2	VPLE-131 VPLE-132S	VE-131 VE-132S	7889 35090	2 3/16 55.6	8 203.2	5 7/8 149.2	6 1/2 165.1	2 3/16 55.6	11/16 17.5	4 1/2 114.3	1 25/32 45.2	1 9/32 32.5	2 3/4 69.9	5/8	6.2 2.81
2 2 3/16	VPLE-132 VPLE-135	VE-132 VE-135	9752 43377	2 7/16 61.9	8 13/16 223.8	6 9/16 166.7	7 5/16 185.7	2 5/16 58.7	13/16 20.6	4 29/32 124.6	1 63/64 50.4	1 7/16 36.5	3 76.2	5/8	7.9 3.58