PTR8-07-30D2



Color: Bronze

Weight: 386.7 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Compliance

CSA Listed:
Suitable for wet locations

Performance

Description:
Steel pole 8" taper 7 gauge 30 foot drilled two sides square base

Construction

Base Shaft Diameter:
8"

Top Diameter:
3.75"

Hand Holes:
Reinforced with grounding lug and removable cover

Base Plates:
Slotted base plates 36,000 p.s.i.

Color:
Bronze powder coating

Height:
30 ft

Gauge:
7

Wall Thickness:
3/16"

Anchor Bolt Templates:
WARNING Template must be printed on 12" x 18" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available online.

Max EPA's/Max Weights:
70MPH 23.1 ft/640 lb.
80MPH 15.4 ft/630 lb.
90MPH 10.1 ft/620 lb.
100MPH 9.7 ft/680 lb.
110MPH 6.8 ft/680 lb.
120MPH 4.6 ft/670lb.
130MPH 2.9 ft/660 lb.
140MPH 1.5 ft/650 lb.
150MPH 0.4 ft/630 lb

Accessories:
Base/Cap: BCK-RT8
Anchor Bolts: BOLT5-8

Other


Terms of Sale:
Pole Terms of Sale is available online.

Buy American Act Compliance:
RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

PTR8-07-30D2

Dimensions

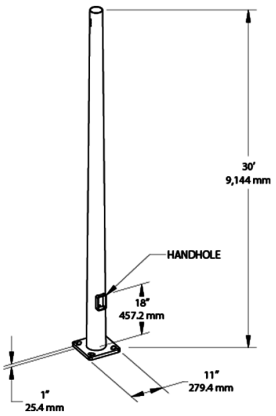

Features

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
P	TR	8	7	30	D2
	R = Round **TR =** Tapered Round	**4 =** 4" **5 =** 5" **6 =** 6" **7 =** 7" **8 =** 8"	**7 =** 7 **11 =** 11	**10 =** 10' **15 =** 15' **20 =** 20' **25 =** 25' **30 =** 30'	**D2 =** Drilled **WT =** Welded Tenon

Copyright © 2024 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice