


SNC 200

Normal-Duty Ball Bearing
Narrow Inner Ring
Eccentric Lock

Seal Styles



Permanent Lubrication

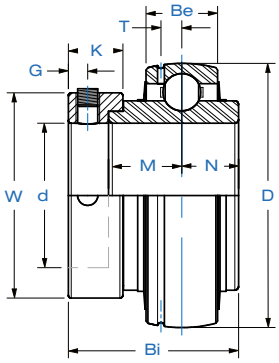

Bearing Insert	Shaft Dia.	Setscrew Used	Dimensions in. mm.									Load Rating lbs. kN.		Weight
	d in. mm.	in. mm.	D	Bi	Be	N	M	T	W	K	G	Dynamic Cr	Static Cor	lbs. kg.
SNC 201-8	1/2	1/4-28	1.850 47.0	1.547 39.3	0.669 17.0	0.500 12.7	0.673 17.1	0.146 3.7	1.311 33.3	0.531 13.5	0.197 5.0	2,331 10.37	1,142 5.08	0.5 0.2
SNC 202-10	5/8	1/4-28												
SNC 204-12	3/4	1/4-28												
SNC 204	20	M6 x 0.75												
SNC 205-14	7/8	1/4-28	2.047 52.0	1.622 41.2	0.669 17.0	0.563 14.3	0.685 17.4	0.154 3.9	1.500 38.1	0.531 13.5	0.197 5.0	2,542 11.31	1,349 6.00	0.6 0.3
SNC 205-15	15/16	1/4-28												
SNC 205	25	M6 x 0.75												
SNC 205-16	1	1/4-28												
SNC 206-17	1 1/16	5/16-24	2.441 62.0	1.811 46.0	0.748 19.0	0.626 15.9	0.717 18.2	0.197 5.0	1.752 44.5	0.626 15.9	0.236 6.0	3,554 15.81	1,942 8.64	0.9 0.4
SNC 206-18	1 1/8	5/16-24												
SNC 206	30	M8 x 1												
SNC 206-20	1 1/4	5/16-24												
SNC 206-19	1 3/16	5/16-24												
SNC 207-20	1 1/4	5/16-24	2.835 72.0	1.961 49.8	0.787 20.0	0.689 17.5	0.740 18.8	0.224 5.7	2.189 55.6	0.689 17.5	0.256 6.5	4,683 20.83	2,626 11.68	1.3 0.6
SNC 207-21	1 5/16	5/16-24												
SNC 207-22	1 3/8	5/16-24												
SNC 207	35	M8 x 1												
SNC 207-23	1 7/16	5/16-24												
SNC 208-24	1 1/2	5/16-24	3.150 80.0	2.122 53.9	0.827 21.0	0.748 19.0	0.843 21.4	0.244 6.2	2.374 60.3	0.720 18.3	0.256 6.5	5,294 23.55	3,057 13.60	1.7 0.8
SNC 208-25	1 9/16	5/16-24												
SNC 208	40	M8 x 1												
SNC 209-26	1 5/8	5/16-24	3.346 85.0	2.122 53.9	0.866 22.0	0.748 19.0	0.843 21.4	0.252 6.4	2.500 63.5	0.720 18.3	0.256 6.5	5,923 26.35	3,507 15.60	1.9 0.9
SNC 209-27	1 11/16	5/16-24												
SNC 209-28	1 3/4	5/16-24												
SNC 209	45	M8X1												
SNC 210-30	1 7/8	5/16-24	3.543 90.0	2.248 57.1	0.945 24.0	0.748 19.0	0.969 24.6	0.256 6.5	2.752 69.9	0.720 18.3	0.256 6.5	6,402 28.48	4,046 18.00	2.3 1.0
SNC 210-31	1 15/16	5/16-24												
SNC 210	50	M8 x 1												
SNC 210-32	2	5/16-24												
SNC 211-32	2	3/8-24	3.937 100.0	2.591 65.8	0.984 25.0	0.874 22.2	1.091 27.7	0.276 7.0	3.000 76.2	0.815 20.7	0.315 8.0	7,931 35.28	5,036 22.40	3.1 1.4
SNC 211-34	2 1/8	3/8-24												
SNC 211	55	M10 x 1.25												
SNC 211-35	2 3/16	3/8-24												
SNC 212-36	2 1/4	3/8-24	4.331 110.0	2.843 72.2	1.063 27.0	1.000 25.4	1.217 30.9	0.299 7.6	3.315 84.2	0.878 22.3	0.315 8.0	9,554 42.50	5,921 26.34	4.2 1.9
SNC 212	60	M10 x 1.25												
SNC 212-38	2 3/8	3/8-24												
SNC 212-39	2 7/16	3/8-24												

LUBRILIFE™ MARINER®

Mariner stainless steel mounted bearings and Lubrilife permanent lubrication are products of Baart Industrial Group (Baart). While Baart has tried to ensure the accuracy of the information contained in this document, Baart accepts no responsibility for inaccurate in, or changes to, such information. All rights reserved. ©2020