


Duty: Standard
Rolling Elements: Ball
Housing: Cast Iron Pillow Block
Self Alignment: +/- 1.5 Degrees
Lock: Eccentric
Seal: Contact and Flinger
Temperature: -20° to 200°F



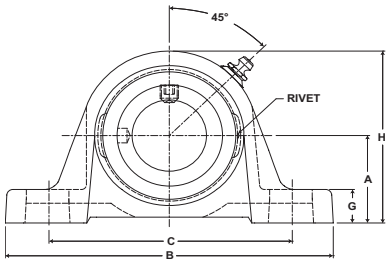

VPE 200 Series Standard Duty Pillow Blocks - Eccentric Locking

Bore Diameter inch	Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm										Bolt Size	Unit Wt. lb/kg
				A	B	C min.	C max.	D	G	H	J	K	L		
1/2 5/8	VPE-208 VPE-210	VE-208 VE-210	2108 9377	1 3/16 30.2	4 7/8 123.8	3 1/8 79.4	4 1/8 104.8	1 7/32 31.0	15/32 11.9	2 7/32 56.4	1 15/32 37.3	59/64 23.4	1 3/16 30.2	3/8	1.0 .45
3/4	VPE-212	VE-212	2611 11614	1 5/16 33.3	5 127.0	3 3/8 85.7	4 3/16 106.4	1 11/32 34.1	17/32 13.5	2 17/32 64.3	1 23/32 43.7	1 3/64 26.6	1 5/16 33.3	3/8	1.5 .68
7/8 15/16 1	VPE-214 VPE-215 VPE-216	VE-214 VE-215 VE-216	2801 12459	1 7/16 36.5	5 1/2 139.7	3 11/16 93.7	4 9/16 115.9	1 13/32 35.7	19/32 15.1	2 13/16 71.4	1 3/4 44.5	1 1/16 27.0	1 1/2 38.1	3/8	1.8 .82
1 1/8 1 3/16 1 1/4	VPE-218 VPE-219 VPE-220S	VE-218 VE-219 VE-220S	4381 19487	1 11/16 42.9	6 3/16 157.2	4 3/16 106.4	5 1/16 128.6	1 3/4 44.5	21/32 16.7	3 9/32 83.3	1 29/32 48.4	1 3/16 30.2	1 3/4 44.5	1/2	2.9 1.32
1 1/4 1 3/8 1 7/16	VPE-220 VPE-222 VPE-223	VE-220 VE-222 VE-223	5782 25718	1 7/8 47.6	6 3/4 171.5	4 5/8 117.5	5 3/8 136.5	1 3/4 44.5	23/32 18.3	3 11/16 93.7	2 1/64 51.2	1 9/32 32.5	2 3/16 55.6	1/2	3.8 1.72
1 1/2	VPE-224	VE-224	7340 32648	2 50.8	7 1/8 181.0	4 7/8 123.8	5 7/8 149.2	1 15/16 49.2	13/16 20.6	4 101.6	2 7/32 56.4	1 3/8 34.9	2 3/8 60.3	1/2	5.0 2.27
1 5/8 1 11/16 1 3/4	VPE-226 VPE-227 VPE-228	VE-226 VE-227 VE-228	7901 35144	2 1/8 54.0	7 3/8 187.3	5 1/4 133.4	6 1/16 154.0	2 50.8	3/4 19.1	4 1/4 108.0	2 7/32 56.4	1 3/8 34.9	2 1/2 63.5	1/2	5.7 2.59
1 15/16	VPE-231	VE-231	7889 35090	2 1/4 57.2	8 203.2	5 7/8 149.2	6 1/2 165.1	2 3/16 55.6	3/4 19.1	4 9/16 115.9	2 15/32 62.7	1 1/2 38.1	2 3/4 69.9	5/8	6.3 2.86
2 2 3/16	VPE-232 VPE-235	VE-232 VE-235	9752 4377	2 1/2 63.5	8 13/16 223.8	6 9/16 166.7	7 5/16 185.7	2 5/16 58.7	7/8 22.2	4 31/32 126.2	2 13/16 71.4	1 23/32 43.7	3 76.2	5/8	8.1 3.67
2 1/4 2 7/16	VPE-236 VPE-239	VE-236 VE-239	13971 62143	2 3/4 69.9	9 1/2 241.3	6 7/8 174.6	7 15/16 201.6	2 3/8 60.3	7/8 22.2	5 9/16 141.3	3 1/16 77.8	1 27/32 46.8	3 3/8 85.7	5/8	10.2 4.63